


<b>Description</b>	: Flat Lithium Battery
<b>Chemical system</b>	: Lithium Manganese Dioxide
<b>Nominal voltage</b>	: 3 Volts
<b>Nominal capacity</b>	: 220mAh
<b>Dimensions</b>	: $\phi 20.0 \times 3.2\text{mm}$
<b>Average weight</b>	: 3.2 grams
<b>Application</b>	: Computer memory back up, Photo
<b>Operating temperature</b>	: $-10^{\circ}\text{C}$ to $+60^{\circ}\text{C}$

## Cross References:


IEC	JIS	Eveready	Varta	Duracell
CR2032	CR2032	ECR2032	CR2032	DL2032

Model No.: **CR2032**

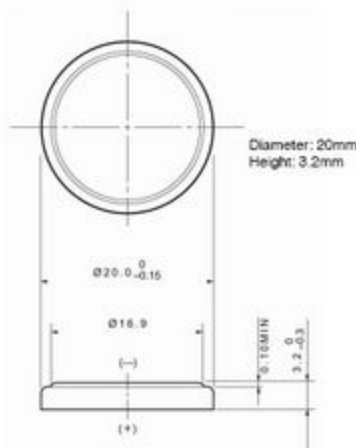


**Dimension Drawing**


## Discharge Characteristics on Load

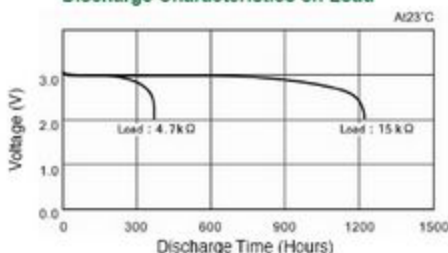



## Discharge Characteristics on Temperature

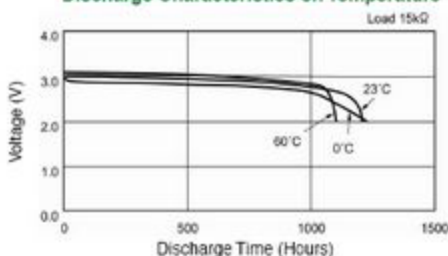

## Discharge Load vs. Discharge Capacity

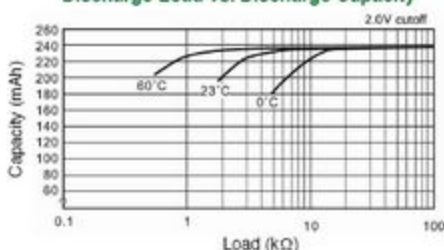

## Discharge Characteristics on Pulse Load (Discharge depth 40%)

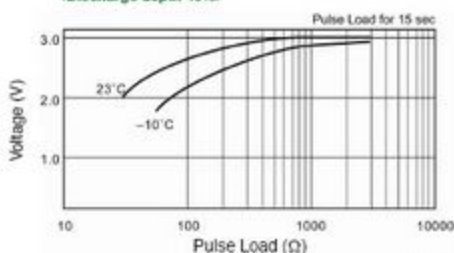

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.